

Powerjet

Industrial and Consumer Cold Water
Pressure Washers and Accessories



HONDA
ENGINES

2015 Product
Catalogue

"Our Mission"

Mancorp's mission is to build a reputation of providing quality products to industry, ensuring customer satisfaction and loyalty, while building long term mutually beneficial business relations



2	Warranty
4	Pressure Washer Design Features
5	Gas Pressure Washers
5	Extreme Industrial - Direct Drive
11	Consumer - Direct Drive
13	Extreme Industrial - Belt Drive
17	Electric Pressure Washers
17	Extreme Industrial - Direct Drive
22	Extreme Industrial - Belt Drive
27	Accessories
27	Guns
29	Wands
33	Telescopic Wands
34	Spray Nozzles
37	Sewer and Drain Cleaning
40	Filters
41	Hose
42	Hose Reels
46	Couplers and Fittings
47	Chemicals
48	Lubricants
49	Sandblast Attachments
50	Surface Cleaning
52	Pumps
53	Unloaders
54	Safety Devices
55	Chemical Controls
57	Hydrostatic Tester / Engine Idle Down
58	Gauges
59	Wheel Kits
60	Car Wash / Pit Cleaners
61	Numeric Index

MANCORP Powerjet Pressure Washer Warranty Policy

(Effective January 1, 2010)

Mancorp limited new product warranty

All Powerjet series pressure washers are warranted to the original purchaser to be free from defects in materials and workmanship under normal use and subject to the exclusions listed below. Any parts replaced under warranty will assume the remainder of the parts warranty period.

Chassis

Frames and handles are covered by a 5 year parts warranty and a 1 year labour warranty and are limited to the exclusions listed below.

Pumps

General and AR pumps are covered by a 5 year limited warranty, Cat pumps are covered by a 1 year limited warranty and all a 1 year labour warranty (General & AR axial piston pumps are covered by a 1 year parts and labour warranty) and are limited to the exclusions listed below.

Honda Engines

Honda GX Series engines are covered by a 3 year limited warranty. GC series engines are covered by a 2 year warranty when used non-commercially and 90 days when used for rental. You must obtain warranty through an authorized Honda engine dealer or distributor and provide a copy of the original invoice and engine registration form. Details of this limited warranty are found in the manual provided.

Electric Motors

Baldor and Marathon motors are covered by a 1 year limited warranty. You must obtain warranty through an authorized dealer or distributor and provide a copy of the original invoice.

Limitations and Exclusions from Warranty

This warranty does not cover the following;

- ❖ Normal wear items, such as nozzles, guns, discharge hoses, wands, quick couplers, seals, filters, gaskets, o-rings, packings, pistons, unloader and valve assemblies. (These components are covered for 90 days parts and labour and are subject to the following exclusions).
- ❖ Damage or malfunctions resulting from accidents, abuse, modifications, alterations, incorrect installation, improper servicing or failure to follow manufacturers maintenance instructions.
- ❖ Damage due to freezing, chemical deterioration, rust or corrosion.
- ❖ Damage due to fluctuations in electrical or water supply.
- ❖ Normal maintenance service, including adjustments, fuel system cleaning and clearing of obstructions.
- ❖ Transportation to service centre, field labour charges or freight damage.

What you must do to obtain Warranty

In order to obtain warranty from Mancorp you must return the defective product to your authorized dealer, freight prepaid, with proof of purchase, within the applicable warranty period. For warranty on failed components you must contact our service department for instructions on the procedure that Mancorp sees practical. The failed component must be returned freight prepaid to Mancorp for inspection before warranty can be granted. Prior to returning the failed component Mancorp will, on approval, send out a replacement component and invoice for it. Warranty credit will be issued upon the inspection of the failed component once it is returned. Engines and motors must be returned to your locally authorized service centres for warranty and therefore Mancorp is not responsible for these claims.

Limitation of liability

Mancorp's liability for special, incidental, or consequential damages is expressly disclaimed. In no event shall Mancorp's liability exceed the purchase price of the product in question. It is the buyer's responsibility to ensure that the installation and use of Mancorp's products conform to local codes and safe practice. Mancorp assumes no responsibility for injury or damage caused by the use of our products. For customer service call 1-800-595-2632.

Warranty Policy

Frames: 5 year parts – 1 year labor

Engines:

Honda GX Series 3 years parts & labor
Rental, Commercial and Consumer use

Honda GC Series 3 months parts & labor
Rental and Commercial use

Honda GC Series 2 years parts & labor
Non-commercial use

Electric Motors:

Rental, Commercial and Consumer use 1 year parts & labor

Pumps:

General 5 year limited* parts – 1 year labor

AR 5 year limited* parts – 1 year labor

Cat 1 year limited* parts – 1 year labor

Consumer 1 year parts & labor

Accessories: 90 Days

Including hoses, guns, wands, nozzles, couplers, unloaders, wheels

* Excludes wear items such as; packings, seals, pistons, valves, o-rings, filters or gaskets (see page 2 for details)



Engines

Honda is the industry leader in 4 stroke engines. These engines meet all current CARB and EPA standards. Using advanced technology Honda engines are reliable, easy to start and provide years of trouble free performance.



HONDA
ENGINES

Motors

Featuring Baldor (made in USA) TEFC Motors for time tested, proven reliability. All models are ETLC approved to CSA standards



Pumps

All aspects of the operation of the pump, engine and components are inspected to ensure trouble free performance of each machine



Frames

Extreme duty frame features: 1.25" x 12 gauge steel chrome plated handles, hose hanger, low profile design with pneumatic tires for reduced vibration and extra durability. PJG and PJE series come with flat free tires.

B frame features: 1" x 14 gauge steel texture black powder coated handles, hose / gun hanger with pneumatic tires for reduced vibration and extra durability. PJG and PJE series come with flat free tires.



Powerjet Extreme wheel kits are the envy of all featuring 10 gauge epoxy powder coated steel, roller bearings and quick collar wheel keepers. PJG and PJE series come with flat free tires.



FEATURES

- ❖ Honda GX series low oil shutdown engines
- ❖ General, Cat or AR pump
- ❖ Industrial and Extreme Duty wheel kits
- ❖ Standard with flat free tires
- ❖ 50' high pressure hose with quick disconnects
- ❖ Insulated shut off gun and 36" wand
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Operating instructions and warning labels

PJG-2000



Shown with Extreme duty wheel kit

OPTIONAL



Industrial "B" Frame



Hose Reel Kit

INCLUDED ACCESSORIES



Models



PJG-2001

General Pump
Extreme duty wheel kit



PJG-2001B

General Pump
Black powder coated "B" frame



PJG-2002B

Cat Pump
Black powder coated "B" frame



PJG-2005B

AR Pump
Black powder coated "B" frame

Specifications

Pressure - P.S.I. 2000
 Volume - G.P.M. 3
 Engine - H.P. 6.5 (196 cc)
 Hose 50' x 3/8"
 Gun 4000 PSI, 300° F
 Wand 36" Insulated
 Nozzles 15-25-40°, soap
 Chemical Downstream
 L/W/H/ 40" x 20" x 23"
 Weight - Kg. 42

FEATURES

- ❖ Honda GX series low oil shutdown engines
- ❖ General, Cat or AR pump
- ❖ Industrial and Extreme Duty wheel kits
- ❖ Standard with flat free tires
- ❖ 50' high pressure hose with quick disconnects
- ❖ Insulated shut off gun and 36" wand
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Operating instructions and warning labels

PJG-2500-6.5



Shown with Extreme duty wheel kit

OPTIONAL



Industrial "B" Frame



Hose Reel Kit

INCLUDED ACCESSORIES



Models



PJG-2501-6.5

General Pump
Extreme duty wheel kit



PJG-2502-6.5B

Cat Pump
Black powder coated "B" frame



PJG-2501-6.5B

General Pump
Black powder coated "B" frame



PJG-2505-6.5B

AR Pump
Black powder coated "B" frame

Specifications

Pressure - P.S.I. 2500
Volume - G.P.M. 3
Engine - H.P. 6.5 (200 cc)
Hose 50' x 3/8"
Gun 4000 PSI, 300° F
Wand 36" Insulated
Nozzles 15-25-40°, soap
Chemical Downstream
L/W/H/ 40" x 20" x 23"
Weight - Kg. 45

FEATURES

- ❖ Honda GX series low oil shutdown engines
- ❖ General pump
- ❖ Industrial and Extreme Duty wheel kits
- ❖ Standard with flat free tires
- ❖ 50' high pressure hose with quick disconnects
- ❖ Insulated shut off gun and 36" wand
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Operating instructions and warning labels

PJG-2500



Shown with Extreme duty wheel kit

OPTIONAL



Industrial "B" Frame



Hose Reel Kit

INCLUDED ACCESSORIES



Models



PJG-2501

General Pump
Extreme duty wheel kit



PJG-2501B

General Pump
Black powder coated "B" frame

Specifications

Pressure - P.S.I. 2500
 Volume - G.P.M. 3.5
 Engine - H.P. 9 (270 cc)
 Hose 50' x 3/8"
 Gun 4000 PSI, 300° F
 Wand 36" Insulated
 Nozzles 15-25-40°, soap
 Chemical Downstream
 L/W/H/ 40" x 20" x 23"
 Weight - Kg. 60

FEATURES

- ❖ Honda GX series low oil shutdown engines
- ❖ General, Cat or AR pump
- ❖ Industrial and Extreme Duty wheel kits
- ❖ Standard with flat free tires
- ❖ 50' high pressure hose with quick disconnects
- ❖ Insulated shut off gun and 36" wand
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Operating instructions and warning labels

PJG-3000



Shown with Extreme duty wheel kit

OPTIONAL



Industrial "B" Frame



Electric Start



Hose Reel Kit

INCLUDED ACCESSORIES



Models



PJG-3000

General Pump - EZ4040
Extreme duty wheel kit



PJG-3001B

General Pump - TX1510G8UIA
Black powder coated "B" frame



PJG-3000B

General Pump - EZ4040
Black powder coated "B" frame



PJG-3002B

Cat Pump
Black powder coated "B" frame



PJG-3001

General Pump - TX1510G8UIA
Extreme duty wheel kit



PJG-3005B

AR Pump
Black powder coated "B" frame

Specifications

Pressure - P.S.I. 3000
Volume - G.P.M. 4
Engine - H.P. 13 (389 cc)
Hose 50' x 3/8"
Gun 4000 PSI, 300° F
Wand 36" Insulated
Nozzles 15-25-40°, soap
Chemical Downstream
L/W/H/ 40" x 20" x 23"
Weight - Kg. 65

FEATURES

- ❖ Honda GX series low oil shutdown engines
- ❖ General or AR pump
- ❖ Industrial and Extreme Duty wheel kits
- ❖ Standard with flat free tires
- ❖ 50' high pressure hose with quick disconnects
- ❖ Insulated shut off gun and 36" wand
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Operating instructions and warning labels

PJG-3500



Shown with Extreme duty wheel kit

OPTIONAL



Industrial "B" Frame



Electric Start



Hose Reel Kit

INCLUDED ACCESSORIES



Models



PJG-3501

General Pump
Extreme duty wheel kit



PJG-3501B

General Pump
Black powder coated "B" frame



PJG-3505

AR Pump
Extreme duty wheel kit



PJG-3505B

AR Pump
Black powder coated "B" frame

Specifications

Pressure - P.S.I. 3500
 Volume - G.P.M. 4
 Engine - H.P. 13 (390 cc)
 Hose 50' x 3/8"
 Gun 4000 PSI, 300° F
 Wand 36" Insulated
 Nozzles 15-25-40°, soap
 Chemical Downstream
 L/W/H/ 40" x 20" x 23"
 Weight - Kg. 70

FEATURES

- ❖ Honda GX series low oil shutdown engines
- ❖ General, Cat or AR pump
- ❖ Industrial and Extreme Duty wheel kits
- ❖ Standard with flat free tires
- ❖ 50' high pressure hose with quick disconnects
- ❖ Insulated shut off gun and 36" wand
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Extreme duty unloader system
- ❖ Safety rupture disc
- ❖ Operating instructions and warning labels

PJG-4000



Shown with Extreme duty wheel kit

OPTIONAL



Industrial "B" Frame



Electric Start



Hose Reel Kit

INCLUDED ACCESSORIES



Models



PJG-4001

General Pump
Extreme duty wheel kit



PJG-4002B

Cat Pump
Black powder coated "B" frame



PJG-4001B

General Pump
Black powder coated "B" frame



PJG-4005B

AR Pump
Black powder coated "B" frame

Specifications

Pressure - P.S.I. 4000
Volume - G.P.M. 4
Engine - H.P. 13 (390 cc)
Hose 50' x 3/8"
Gun 4000 PSI, 300° F
Wand 36" Insulated
Nozzles 15-25-40°, soap
Chemical Downstream
L/W/H/ 40" x 20" x 23"
Weight - Kg. 78

FEATURES

- ❖ Honda GC engine series
- ❖ AR axial piston pump
- ❖ Industrial duty wheel kit with pneumatic tires
- ❖ 50' high pressure hose with quick disconnects
- ❖ Insulated shut off wand and 36" wand
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Operating instructions and warning labels

GC-Series



OPTIONAL



Hose Reel Kit

INCLUDED ACCESSORIES



Models

**GC-2305B**

AR Pump
Black powder coated "B" frame

**GC-2705B**

AR Pump
Black powder coated "B" frame

Specifications GC-2305B

Pressure - P.S.I. 2300
 Volume - G.P.M. 2.4
 Engine - H.P. 5 (160 cc)
 Hose 50' x 3/8"
 Gun 4000 PSI, 300° F
 Wand 36" Insulated
 Nozzles 15-25-40°, soap
 Chemical Downstream
 L/W/H/ 40" x 20" x 28"
 Weight - Kg. 30

Specifications GC-2705B

Pressure - P.S.I. 2700
 Volume - G.P.M. 2.4
 Engine - H.P. 6 (190 cc)
 Hose 50' x 3/8"
 Gun 4000 PSI, 300° F
 Wand 36" Insulated
 Nozzles 15-25-40°, soap
 Chemical Downstream
 L/W/H/ 40" x 20" x 28"
 Weight - Kg. 30

FEATURES

- ❖ Honda GC engine series
- ❖ AR axial piston pump
- ❖ Industrial duty wheel kit with pneumatic tires
- ❖ 25' high pressure hose with quick disconnects
- ❖ Insulated shut off wand and 36" wand
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Operating instructions and warning labels

GC-BI Series



OPTIONAL



Hose Reel Kit

INCLUDED ACCESSORIES



Models

Specifications GC-2305BI

Specifications GC-2705BI



GC-2305BI-25

AR Pump, Made in China
Black powder coated "B" frame



GC-2705BI-25

AR Pump, Made in China
Black powder coated "B" frame

Pressure - P.S.I.....2300
Volume - G.P.M.2.4
Engine - H.P.....5 (160 cc)
Hose.....25' x 3/8"
Gun4000 PSI, 300° F
Wand.....36" Insulated
Nozzles15-25-40°, soap
Chemical.....Downstream
L/W/H/.....40" x 20" x 28"
Weight - Kg.30

Pressure - P.S.I.....2700
Volume - G.P.M.2.4
Engine - H.P.....6 (190 cc)
Hose.....25' x 3/8"
Gun4000 PSI, 300° F
Wand.....36" Insulated
Nozzles15-25-40°, soap
Chemical.....Downstream
L/W/H/.....40" x 20" x 28"
Weight - Kg.30

FEATURES

- ❖ Honda low oil shutdown engines
- ❖ General low R.P.M. belt drive triplex ceramic plunger pump
- ❖ Insulated shut off gun and 36" wand with quick disconnect
- ❖ 50' high pressure hose with quick disconnect
- ❖ Extreme duty wheel kit with pneumatic tires
- ❖ Belt drive system
- ❖ Dual cog cast iron pulleys
- ❖ OSHA approved totally enclosed belt guard
- ❖ Easy tensioning with alignment bolts
- ❖ Anti vibration foot pads
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Extreme duty unloader system
- ❖ Thermal pump protector
- ❖ Operating instructions and warning labels

PG4-2500



Ani-Vibration Pad

OPTIONAL



Electric Start



Hose Reel Kit

INCLUDED ACCESSORIES



Models



PG4-25321TM

General Pump
Belt Drive

We can custom build our belt drive models to suit your pump brand and specifications.

Specifications

Pressure - P.S.I.....	2500
Volume - G.P.M.	3.2
Engine - H.P.....	9 (270 cc)
Hose.....	50' x 3/8"
Gun	4000 PSI, 300° F
Wand.....	36" Insulated
Nozzles	15-25-40°, soap
Chemical.....	Downstream
L/W/H/.....	40" x 27" x 28"
Weight - Kg.	100

FEATURES

- ❖ Honda low oil shutdown engines
- ❖ General low R.P.M. belt drive triplex ceramic plunger pump
- ❖ Insulated shut off gun and 36" wand with quick disconnect
- ❖ 50' high pressure hose with quick disconnect
- ❖ Extreme duty wheel kit with pneumatic tires
- ❖ Belt drive system
- ❖ Dual cog cast iron pulleys
- ❖ OSHA approved totally enclosed belt guard
- ❖ Easy tensioning with alignment bolts
- ❖ Anti vibration foot pads
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Extreme duty unloader system
- ❖ Operating instructions and warning labels

PG4-3000



Ani-Vibration Pad

OPTIONAL



Electric Start



Hose Reel Kit

INCLUDED ACCESSORIES



Models



PG4-30321M

General Pump
Belt Drive



PG4-35321M

General Pump
Belt Drive

We can custom build our belt drive models to suit your pump brand and specifications.

Specifications - PG4-30321

Pressure - P.S.I. 3000
Volume - G.P.M. 3.5
Engine - H.P. 13 (389 cc)
Hose 50' x 3/8"
Gun 4000 PSI, 300° F
Wand 36" Insulated
Nozzles 15-25-40°, soap
Chemical Downstream
L/W/H/ 40" x 27" x 28"
Weight - Kg. 108

Specifications - PG4-35321

Pressure - P.S.I. 3500
Volume - G.P.M. 4
Engine - H.P. 13 (389 cc)
Hose 50' x 3/8"
Gun 4000 PSI, 300° F
Wand 36" Insulated
Nozzles 15-25-40°, soap
Chemical Downstream
L/W/H/ 40" x 27" x 28"
Weight - Kg. 108

FEATURES

- ❖ Honda low oil shutdown electric start engine
- ❖ General low R.P.M. belt drive triplex ceramic plunger pump
- ❖ Insulated shut off gun and 36" wand with quick disconnect
- ❖ 50' high pressure hose with quick disconnect
- ❖ Extreme duty wheel kit with pneumatic tires
- ❖ Belt drive system
- ❖ Dual cog cast iron pulleys
- ❖ OSHA approved totally enclosed belt guard
- ❖ Easy tensioning with alignment bolts
- ❖ Anti vibration foot pads
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Extreme duty unloader system
- ❖ Safety rupture disc
- ❖ Operating instructions and warning labels

PG4-4000



Ani-Vibration Pad

OPTIONAL



Optional Roll Cage Frame



Hose Reel Kit

INCLUDED ACCESSORIES



Models



PG4-40321EM

General Pump
Belt Drive



MP4-40321EM

General Pump
Belt Drive, Roll Cage Frame



PG4-40324EM

Landa Pump
Belt Drive



MP4-40324EM

Landa Pump
Belt Drive, Roll Cage Frame

We can custom build our belt drive models to suit your pump brand and specifications.

Specifications

Pressure - P.S.I. 4000
 Volume - G.P.M. 4
 Engine - H.P. 20 Electric Start (620 cc)
 Hose 50' x 3/8"
 Gun 4000 PSI, 300° F
 Wand 36" Insulated
 Nozzles 15-25-40°, soap
 Chemical Downstream
 L/W/H/ 48" x 27" x 30"
 Weight - Kg. 128

FEATURES

- ❖ Honda low oil shutdown electric start engine
- ❖ General low R.P.M. belt drive triplex ceramic plunger pump
- ❖ Insulated shut off gun and 48" wand with quick disconnect
- ❖ 50' high pressure hose with quick disconnect
- ❖ Extreme duty wheel kit with pneumatic tires
- ❖ Belt drive system
- ❖ Dual cog cast iron pulleys
- ❖ OSHA approved totally enclosed belt guard
- ❖ Easy tensioning with alignment bolts
- ❖ Anti vibration foot pads
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Extreme duty unloader system
- ❖ Safety rupture disc
- ❖ Operating instructions and warning labels

PG5-5000



Ani-Vibration Pad

OPTIONAL



Optional Roll Cage Frame



Hose Reel Kit

INCLUDED ACCESSORIES



Models



PG5-50321EM

General Pump
Belt Drive



MP5-50321EM

General Pump
Belt Drive, Roll Cage Frame



PG5-50324EM

Landa Pump
Belt Drive



MP5-50324EM

Landa Pump
Belt Drive, Roll Cage Frame

We can custom build our belt drive models to suit your pump brand and specifications.

Specifications

Pressure - P.S.I. 5000
 Volume - G.P.M. 4.5
 Engine - H.P. 20 Electric Start (620 cc)
 Hose 50' x 3/8"
 Gun 5000 PSI, 300° F
 Wand 48" Insulated
 Nozzles 15-25-40°, soap
 Chemical Downstream
 L/W/H/ 48" x 27" x 30"
 Weight - Kg. 143/PG, 215/MP

PJE-1000

FEATURES

- ❖ Industrial Duty Marathon TEFC electric motor
- ❖ General direct drive pumps
- ❖ Industrial and Extreme Duty wheel kits
- ❖ Standard with flat free tires
- ❖ 50' high pressure hose with quick disconnects
- ❖ Insulated shut off gun and 36" wand
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Operating instructions and warning labels.



Shown with Extreme duty wheel kit

OPTIONAL



Industrial "B" Frame



Hose Reel Cart



Auto Start/Stop with
Time Delay Shutdown



Auto Start/Stop



Stationary and wall
mount frames

INCLUDED ACCESSORIES



Models



PJE-1001

General Pump
Extreme duty wheel kit



PJE-1001B

General Pump
Black powder coated "B" frame

Specifications

Pressure - P.S.I. 1000
 Volume - G.P.M. 2.1
 Motor - H.P. 1.5
 Volt / Phase / Amp ... 115 / 1 / 15
 Hose 50' x 3/8"
 Gun 4000 PSI, 300° F
 Wand 36" Insulated
 Nozzles 15-25-40°, soap
 Chemical Downstream
 L/W/H/ 40" x 20" x 23"
 Weight - Kg. 45

FEATURES

- ❖ Industrial Duty Baldor TEFC electric motor
- ❖ General direct drive pumps
- ❖ Industrial and Extreme Duty wheel kits
- ❖ Standard with flat free tires
- ❖ 50' high pressure hose with quick disconnects
- ❖ Insulated shut off gun and 36" wand
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Operating instructions and warning labels.

PJE-1400



Shown with Extreme duty wheel kit

OPTIONAL



Industrial "B" Frame



Hose Reel Cart



Auto Start/Stop with
Time Delay Shutdown



Auto Start/Stop



Stationary and wall
mount frames

INCLUDED ACCESSORIES



Models



PJE-1401

General Pump
Extreme duty wheel kit



PJE-1401B

General Pump
Black powder coated "B" frame

Specifications

Pressure - P.S.I. 1400
Volume - G.P.M. 2.1
Motor - H.P. 2.0
Volt / Phase / Amp ... 115 / 1 / 20
Hose 50' x 3/8"
Gun 4000 PSI, 300° F
Wand 36" Insulated
Nozzles 15-25-40°, soap
Chemical Downstream
L/W/H/ 40" x 20" x 23"
Weight - Kg. 45

PJE-1500

FEATURES

- ❖ Industrial Duty Baldor TEFC electric motor
- ❖ General direct drive pumps
- ❖ Industrial and Extreme Duty wheel kits
- ❖ Standard with flat free tires
- ❖ 50' high pressure hose with quick disconnects
- ❖ Insulated shut off gun and 36" wand
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Operating instructions and warning labels.



Shown with Extreme duty wheel kit

OPTIONAL



Industrial "B" Frame



Hose Reel Cart



Auto Start/Stop with
Time Delay Shutdown



Auto Start/Stop



Stationary and wall
mount frames

INCLUDED ACCESSORIES



Models



PJE-1501

General Pump
Extreme duty wheel kit



PJE-1501B

General Pump
Black powder coated "B" frame

Specifications

Pressure - P.S.I.....	1500
Volume - G.P.M.	3
Motor - H.P.....	3
Volt / Phase / Amp ...	230 / 1 / 13
Hose.....	50' x 3/8"
Gun	4000 PSI, 300° F
Wand.....	36" Insulated
Nozzles	15-25-40°, soap
Chemical	Downstream
L/W/H/.....	40" x 20" x 23"
Weight - Kg.	50

FEATURES

- ❖ Industrial Duty Baldor TEFC electric motor
- ❖ General direct drive pumps
- ❖ Industrial and Extreme Duty wheel kits
- ❖ Standard with flat free tires
- ❖ 50' high pressure hose with quick disconnects
- ❖ Insulated shut off gun and 36" wand
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Operating instructions and warning labels.

PJE-2000



Shown with Extreme duty wheel kit

OPTIONAL



Industrial "B" Frame



Hose Reel Cart



Auto Start/Stop with
Time Delay Shutdown



Auto Start/Stop



Stationary and wall
mount frames

INCLUDED ACCESSORIES



Models



PJE-2001

General Pump
Extreme duty wheel kit



PJE-2001B

General Pump
Black powder coated "B" frame

Specifications

Pressure - P.S.I. 2000
Volume - G.P.M. 3.5
Motor - H.P. 5
Volt / Phase / Amp ... 230 / 1 / 22
Hose 50' x 3/8"
Gun 4000 PSI, 300° F
Wand 36" Insulated
Nozzles 15-25-40°, soap
Chemical Downstream
L/W/H/ 40" x 20" x 23"
Weight - Kg. 55

PJE-3000

FEATURES

- ❖ Industrial Duty Baldor TEFC electric motor
- ❖ General direct drive pumps
- ❖ Industrial and Extreme Duty wheel kits
- ❖ Standard with flat free tires
- ❖ 50' high pressure hose with quick disconnects
- ❖ Insulated shut off gun and 36" wand
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Operating instructions and warning labels.



Shown with Extreme duty wheel kit

OPTIONAL



Industrial "B" Frame



Hose Reel Cart



Auto Start/Stop with
Time Delay Shutdown



Auto Start/Stop



Stationary and wall
mount frames

INCLUDED ACCESSORIES



Models



PJE-3001

General Pump
Extreme duty wheel kit



PJE-3001B

General Pump
Black powder coated "B" frame

Specifications

Pressure - P.S.I.....	3000
Volume - G.P.M.	4
Motor - H.P.....	7.5
Volt / Phase / Amp ...	230 / 3 / 21
Hose.....	50' x 3/8"
Gun	4000 PSI, 300° F
Wand.....	36" Insulated
Nozzles	15-25-40°, soap
Chemical	Downstream
L/W/H/.....	40" x 20" x 23"
Weight - Kg.	95

FEATURES

- ❖ Industrial Duty Baldor TEFC electric motor
- ❖ General belt drive pumps
- ❖ Low R.P.M. Belt Drive operation
- ❖ Extreme Duty wheel kits
- ❖ Pneumatic or optional flat free tires
- ❖ Belt drive system
- ❖ Dual cog cast iron pulleys
- ❖ OSHA approved totally enclosed belt guard
- ❖ Easy tensioning with aligning bolts
- ❖ 50' high pressure hose with quick disconnects
- ❖ Insulated shut off gun and 36" wand
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Extreme duty unloader system
- ❖ Operating instructions and warning labels.

PE4-2000



INCLUDED ACCESSORIES



OPTIONAL



Hose Reel Cart



Stationary and wall
mount frames



Auto Start/Stop with
Time Delay Shutdown



Auto Start/Stop

Models



PE4-20021A

230V / 1 Ph / 27 Amp
General Pump



PE4-20021C

460V / 3 Ph / 8 Amp
General Pump



PE4-20021B

230V / 3 Ph / 16 Amp
General Pump



PE4-20021F

575V / 3 Ph / 6.4 Amp
General Pump

We can custom build our belt drive models to suit your pump brand and specifications.

Specifications

Pressure - P.S.I. 2000
Volume - G.P.M. 3.5
Motor - H.P. 5
Volt / Phase / Amp ... see model for details
Hose 50' x 3/8"
Gun 4000 PSI, 300° F
Wand 36" Insulated
Nozzles 15-25-40°, soap
Chemical Downstream
L/W/H/ 40" x 20" x 23"
Weight - Kg. 100

FEATURES

- ❖ Industrial Duty Baldor TEFC electric motor
- ❖ General belt drive pumps
- ❖ Low R.P.M. Belt Drive operation
- ❖ Extreme Duty wheel kits
- ❖ Pneumatic or optional flat free tires
- ❖ Belt drive system
- ❖ Dual cog cast iron pulleys
- ❖ OSHA approved totally enclosed belt guard
- ❖ Easy tensioning with aligning bolts
- ❖ 50' high pressure hose with quick disconnects
- ❖ Insulated shut off gun and 36" wand
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Extreme duty unloader system
- ❖ Operating instructions and warning labels.

PE4-3000



INCLUDED ACCESSORIES



OPTIONAL



Hose Reel Cart



Stationary and wall
mount frames



Auto Start/Stop with
Time Delay Shutdown



Auto Start/Stop

Models



PE4-30021A

230V / 1 Ph / 36 Amp
General Pump



PE4-30021B

230V / 3 Ph / 22 Amp
General Pump



PE4-30021C

460V / 3 Ph / 11 Amp
General Pump



PE4-30021F

575V / 3 Ph / 8.8 Amp
General Pump

We can custom build our belt drive models to suit your pump brand and specifications.

Specifications

Pressure - P.S.I. 3000
Volume - G.P.M. 3.5
Motor - H.P. 7.5
Volt / Phase / Amp ... see model for details
Hose 50' x 3/8"
Gun 4000 PSI, 300° F
Wand 36" Insulated
Nozzles 15-25-40°, soap
Chemical Downstream
L/W/H/ 48" x 28" x 28"
Weight - Kg. 128

FEATURES

- ❖ Industrial Duty Baldor TEFC electric motor
- ❖ General belt drive pumps
- ❖ Low R.P.M. Belt Drive operation
- ❖ Extreme Duty cage frame wheel kits
- ❖ Heavy Duty 13" pneumatic tires
- ❖ Belt drive system
- ❖ Dual cog cast iron pulleys
- ❖ OSHA approved totally enclosed belt guard
- ❖ Easy tensioning with aligning bolts
- ❖ 50' high pressure hose with quick disconnects
- ❖ Insulated shut off gun and 36" wand
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Extreme duty unloader system
- ❖ Operating instructions and warning labels.

MPE5-3000



INCLUDED ACCESSORIES



OPTIONAL



Hose Reel Cart



Stationary and wall
mount frames



Auto Start/Stop with
Time Delay Shutdown



Auto Start/Stop

Models



PE5-30021B

230V / 3 Ph / 26.8 Amp
General Pump



PE5-30021F

575V / 3 Ph / 10.7 Amp
General Pump



PE5-30021C

460V / 3 Ph / 13.4 Amp
General Pump

We can custom build our belt drive models to suit your pump brand and specifications.

Specifications

Pressure - P.S.I. 3000
Volume - G.P.M. 4.8
Motor - H.P. 10
Volt / Phase / Amp ... see model for details
Hose 50' x 3/8"
Gun 4000 PSI, 300° F
Wand 36" Insulated
Nozzles 15-25-40°, soap
Chemical Downstream
L/W/H/ 48" x 28" x 28"
Weight - Kg. 130

FEATURES

- ❖ Industrial Duty Baldor TEFC electric motor
- ❖ General belt drive pumps
- ❖ Low R.P.M. Belt Drive operation
- ❖ Extreme Duty cage frame wheel kits
- ❖ Heavy Duty 13" pneumatic tires
- ❖ Belt drive system
- ❖ Dual cog cast iron pulleys
- ❖ OSHA approved totally enclosed belt guard
- ❖ Easy tensioning with aligning bolts
- ❖ 50' high pressure hose with quick disconnects
- ❖ Insulated shut off gun and 36" wand
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Extreme duty unloader system
- ❖ Safety rupture disc
- ❖ Operating instructions and warning labels.

MPE4-4000



INCLUDED ACCESSORIES



OPTIONAL



Hose Reel Cart



Stationary and wall
mount frames



Auto Start/Stop with
Time Delay Shutdown



Auto Start/Stop

Models



PE4-40021B

230V / 3 Ph / 26.8 Amp
General Pump



PE4-40021C

460V / 3 Ph / 13.4 Amp
General Pump



PE4-40021F

575V / 3 Ph / 10.7 Amp
General Pump

We can custom build our belt drive models to suit your pump brand and specifications.

Specifications

Pressure - P.S.I. 4000
Volume - G.P.M. 4.0
Motor - H.P. 10
Volt / Phase / Amp ... see model for details
Hose 50' x 3/8"
Gun 4000 PSI, 300° F
Wand 36" Insulated
Nozzles 15-25-40°, soap
Chemical Downstream
L/W/H/ 48" x 28" x 28"
Weight - Kg. 130

FEATURES

- ❖ Industrial Duty Baldor TEFC electric motor
- ❖ General belt drive pumps (Cat, AR and Landa pumps available on request)
- ❖ Extreme Duty cage frame wheel kits
- ❖ Heavy Duty 13" pneumatic tires
- ❖ Belt drive system
- ❖ Dual cog cast iron pulleys
- ❖ OSHA approved totally enclosed belt guard
- ❖ Easy tensioning with aligning bolts
- ❖ 50' high pressure hose with quick disconnects
- ❖ Insulated shut off gun and 36" wand
- ❖ 3 high pressure nozzles, 1 soap nozzle
- ❖ Downstream chemical injector
- ❖ Variable pressure control
- ❖ Thermal pump protector
- ❖ Extreme duty unloader system
- ❖ Safety rupture disc
- ❖ Operating instructions and warning labels.

MPE5-5000



INCLUDED ACCESSORIES



OPTIONAL



Hose Reel Cart



Stationary and wall
mount frames



Auto Start/Stop with
Time Delay Shutdown



Auto Start/Stop

Models

LANDA® MPE5-50024B

230V / 3 Ph / 48 Amp
Landa Pump

LANDA® MPE5-50024F

575V / 3 Ph / 21 Amp
Landa Pump

LANDA® MPE5-50024C

460V / 3 Ph / 26 Amp
Landa Pump

We can custom build our belt drive models to suit your pump brand and specifications.

Specifications

Pressure - P.S.I. 5000
 Volume - G.P.M. 5
 Motor - H.P. 20
 Volt / Phase / Amp ... see models for details
 Hose 50' x 3/8"
 Gun 5000 PSI, 300° F
 Wand 48" Insulated
 Nozzles 15-25-40°, soap
 Chemical Downstream
 L/W/H/ 42" x 26" x 30"
 Weight - Kg. 220

Suttner ST-1500 Gun

- ❖ 4000 PSI
- ❖ 12 GPM
- ❖ 300° F
- ❖ 3/8" FNPT Inlet
- ❖ 1/4" FNPT Outlet

4-01205

Repair Kit:

84-202000044**Landa Gun**

- ❖ 5000 PSI
- ❖ 10.5 GPM
- ❖ 320° F
- ❖ 3/8" FNPT Inlet
- ❖ 1/4" FNPT Outlet

4-01212**Giant Gun**

- ❖ 5000 PSI
- ❖ 10 GPM
- ❖ 300° F
- ❖ 3/8" FNPT Inlet
- ❖ 1/4" FNPT Outlet

81-21250**Suttner Open Flow Gun**

- ❖ 3000 PSI
- ❖ 300° F
- ❖ 3/8" FNPT Inlet
- ❖ 1/4" FNPT Outlet
- ❖ Use for steam applications

4-01202**PA Anti-Fatigue Guns**

- ❖ 320° F
- ❖ 3/8" FNPT Inlet
- ❖ 1/4" FNPT Outlet

Part Number	Description
4-YRL51	4050 PSI, 13.2 GPM
4-YRL56	5650 PSI, 8 GPM



Industrial High Pressure Gun

- ❖ 7250 PSI
- ❖ 26 GPM
- ❖ 300° F
- ❖ 1/2" FNPT Inlet
- ❖ 3/8" FNPT outlet

84-203002600



Suttner Cam Action Anti-Fatigue Gun

- ❖ 5000 PSI
- ❖ 12 GPM
- ❖ 300° F
- ❖ Stainless inlet tube
- ❖ Suttner model ST-2605
- ❖ 3/8" FNPT Inlet
- ❖ 1/4" FNPT Outlet

84-202605600



Linear Gun

- ❖ 4000 PSI
- ❖ 300° F
- ❖ 10 GPM
- ❖ 3/8" FNPT Inlet
- ❖ 1/4" FNPT Outlet

4-01204



Straight Through Gun

- ❖ Rubberized grip
- ❖ 2000 PSI
- ❖ 10 GPM
- ❖ 200° F
- ❖ 18" lance
- ❖ 3/8" FNPT Inlet
- ❖ 1/4" FNPT Outlet

4-352616



Industrial Gun & Wand Assemblies

- ❖ 4000 PSI
- ❖ 12 GPM
- ❖ 300° F
- ❖ 3/8" QD plug inlet
- ❖ 1/4" QD coupler outlet


SUTTNER


Part Number	Description
84-100024	Gun with 24" wand, with couplers
84-100036	Gun with 36" wand, with couplers
84-100048	Gun with 48" wand, with couplers
84-100060	Gun with 60" wand, with couplers
84-100079	Gun with 79" wand, with couplers

Industrial Gun & Wand Assemblies

- ❖ 7250 PSI
- ❖ 26 GPM
- ❖ 300° F
- ❖ Stainless Steel
- ❖ 3/8" ID pipe
- ❖ 1/4" FNPT outlet
- ❖ 1/2" FNPT inlet



Part Number	Description
84-999000026	18.5" Lance and side handle only
84-999000027	38" Lance and side handle only
84-203002600	Gun only

Consumer Gun & Wand Assembly

- ❖ Gun with 36" wand, QD fittings
- ❖ 4000 PSI
- ❖ 12 GPM
- ❖ 300° F
- ❖ 3/8" QD plug inlet
- ❖ 1/4" QD coupler outlet


89-100036

Industrial Suttner Wands

- ❖ Maximum 5800 PSI
- ❖ Rolled threads not cut
- ❖ 1/4" MNPT ends
- ❖ Zinc plated
- ❖ Insulated grips
- ❖ Made in Germany

Part Number	Description
85-5170D24	24" Insulated Wand
85-5170D36	36" Insulated Wand
85-5170D48	48" Insulated Wand
85-5170D60	60" Insulated Wand
85-5170D79	79" Insulated Wand



Side Handles

Part Number	Description
4-01207	Slide on side handle
84-200009700	Side handle for moulded grip lances



4-01207



84-200009700



Variable Pressure Control Wands

- ❖ Infinite pressure control
- ❖ Remote downstream chemical control
- ❖ Zinc plated or stainless steel
- ❖ Temperature range up to 300° F
- ❖ 4000 PSI pressure
- ❖ 10 GPM volume



Part Number	Description
4-011142A	36" Variable control wand with couplers, zinc
4-0111421	72" Variable control wand with couplers , zinc
4-0111381A	36" Variable control wand with couplers , zinc
4-011143A	40" Variable control wand with couplers, stainless steel

* Wand only, Gun sold separately

Steam Gun and Wand

- ❖ Open or trigger gun design
- ❖ 1500 PSI pressure
- ❖ 12 GPM volume
- ❖ 450° F temperature rating



Part Number	Description
4-500500	599 Open grip with swivel
4-500000	592 Trigger gun with swivel

Trigger Wand 48"

- ❖ High or low pressure trigger
- ❖ Rinse or chemical trigger
- ❖ 3600 PSI pressure rated
- ❖ 12 GPM volume
- ❖ 300° F temperature
- ❖ Lance only

4-368158



Push Pull Wand 33"

- ❖ 90° bend radius for any angle of control
- ❖ 3000 PSI pressure rated
- ❖ 6 GPM volume
- ❖ 300° F temperature
- ❖ Lance only

84-200085710



Flex Wand

- ❖ 180° flex angle
- ❖ 2000 PSI pressure rated
- ❖ 6 GPM volume
- ❖ 200° F temperature



Part Number	Description
4-368118	18", lance only
4-368124	24", lance only

Gutter Cleaner

- ❖ Includes quick disconnect fittings
- ❖ Works with telescopic wand

4-2100



Flex Wand

- ❖ 3000 PSI
- ❖ 190° F
- ❖ 12" Lance
- ❖ 1/4" MNPT x 1/4" FNPT
- ❖ 90° Flex angle

4-01109



Fiberglass Telescoping Wands

- ❖ 3 Section twist lock design
- ❖ 3500 PSI pressure rated
- ❖ 10.5 GPM volume
- ❖ 195° F temperature

Part Number	Description
4-0111518	18' Fiberglass telescoping
4-0111524	24' Fiberglass telescoping

Telescopic Wand Belt

4-0111518B



Pressure Adjuster Side Handle

- ❖ Optional

4-0111519CK



Brush for Telescoping Wand

- ❖ 3" x 10" Supersoft
- ❖ Low pressure
- ❖ Fits all telescoping wands

4-2100BR



Quick Disconnect Spray Nozzles

- ❖ 4000 PSI
- ❖ Fits most 1/4" Quick Disconnect couplers
- ❖ Color coded for angle of spray
- ❖ Stainless steel body

Part number ordering sequence:

4-1280XXXX (first two x-marks are for nozzle size, second are for angle of spray)

e.g. 4-12804515 = 045 Nozzle size, 15° Spray angle



1/4 MEG Threaded Nozzles

- ❖ 5000 PSI
- ❖ 1/4" MNPT threaded
- ❖ Stainless steel body

Part number ordering sequence:

4-0140XXXX (first two x-marks are for nozzle size, second are for angle of spray)

e.g. 4-01404515 = 045 Nozzle size, 15° Spray angle



Nozzle Rating Guide

- ❖ Refer to guide below using GPM and PSI to determine proper nozzle size

Nozzle Size	1000 PSI	1500 PSI	2000 PSI	2500 PSI	3000 PSI	3500 PSI	4000 PSI	5000 PSI
020	1.00	1.20	1.41	1.60	1.73	1.90	2.00	2.24
025	1.25	1.50	1.77	2.00	2.17	2.30	2.50	2.80
030	1.50	1.80	2.12	2.40	2.60	2.80	3.00	3.35
035	1.75	2.10	2.47	2.80	3.03	3.30	3.50	3.91
040	2.00	2.40	2.83	3.20	3.46	3.70	4.00	4.47
045	2.25	2.80	3.18	3.60	3.90	4.20	4.50	5.03
050	2.50	3.10	3.54	4.00	4.33	4.70	5.00	5.59
055	2.75	3.40	3.89	4.30	4.76	5.10	5.50	6.15
060	3.00	3.70	4.24	4.70	5.20	5.60	6.00	6.71
065	3.25	4.00	4.60	5.10	5.63	6.10	6.50	7.27
070	3.50	4.30	4.95	5.50	6.06	6.50	7.00	7.83
075	3.75	4.60	5.30	5.90	6.50	7.00	7.50	8.39
080	4.00	4.90	5.66	6.30	6.93	7.50	8.00	8.94
085	4.25	5.20	6.01	6.70	7.36	8.00	8.50	9.50
090	4.50	5.50	6.36	7.10	7.79	8.40	9.00	10.06
100	5.00	6.10	7.07	7.90	8.66	9.40	10.00	11.18
120	6.00	7.30	8.50	9.50	10.40	11.20	12.00	13.40
150	7.50	9.20	10.60	11.90	13.00	14.00	15.00	16.80

Soap Nozzles

- ❖ Brass quick disconnect or threaded
- ❖ 65 Degree
- ❖ 40 Nozzle size

Part Number	Description
4-16540	Quick disconnect soap nozzle
4-0146540	1/4 MNPT soap nozzle



Quick
Disconnect



1/4 MNPT

Vari-Fan Nozzle

- ❖ 0 - 80° Spray fan angle
- ❖ 2000 PSI pressure rated
- ❖ 6 GPM volume
- ❖ 140° F temperature
- ❖ 045 nozzle size

4-19245



Vari-Fan Hi/Low Nozzle

- ❖ 0 - 80° Spray fan angle
- ❖ Hi/Low pressure for rinse and chemical
- ❖ 4000 PSI pressure rated
- ❖ 8 GPM volume
- ❖ 200° F temperature



Part Number	Description
4-374091	040 nozzle size
4-374092	045 nozzle size

Steam Nozzle

- ❖ One piece brass construction
- ❖ Cone spray pattern
- ❖ 3/8" MNPT
- ❖ 1450 PSI pressure rated
- ❖ 6 GPM volume
- ❖ 320° F temperature

4-2000



Steam Nozzle

- ❖ One piece brass construction
- ❖ Flat spray pattern
- ❖ 1/4" MNPT
- ❖ 1450 PSI pressure rated
- ❖ 6 GPM volume
- ❖ 320° F temperature

4-373710



General Rotating Nozzles

Part Number	Max PSI	Max ° F	GPM
4-2012	3625	180	4.2 – 5.5
4-2013	3625	180	2.9 – 4.0
4-2014	3625	180	2.1 – 2.6



**Protect your rotating nozzle
with a high pressure filter**

**See also in filter section
P/N 2-99071P**



Rotating Turbo Nozzles – Germany

- ❖ Rated 3600 to 5800 PSI
- ❖ 190° F to 212° F
- ❖ Refer to nozzle chart for proper size

Part Number	Max PSI	Max ° F	Orifice Size
84-200357530	3600	190	3.0
84-200357535	3600	190	3.5
84-200357540	3600	190	4.0
84-200357545	3600	190	4.5
84-200357550	3600	190	5.0
84-200357555	3600	190	5.5
84-200357560	3600	190	6.0
84-200357570	3600	190	7.0
84-200357580	3600	190	8.0
84-200457530	5800	212	3.0
84-200457535	5800	212	3.5
84-200457540	5800	212	4.0
84-200457545	5800	212	4.5
84-200457550	5800	212	5.0
84-200457555	5800	212	5.5
84-200457560	5800	212	6.0
84-200457570	5800	212	7.0
84-200457580	5800	212	8.0




Sewer/Drain Nozzles

- ❖ 4200 PSI maximum
- ❖ Stainless Steel
- ❖ Orifice sizes up to 140

Part Number	Description
84-122370170	1/8" FNPT, .055 orifice One forward / Three Back jets
84-121370170	1/4" FNPT, .045 orifice One forward / Three Back jets
84-123065187	3/8" FNPT, .055 orifice One forward / Four Back jets

A wide variety of specialty nozzles are available upon request.

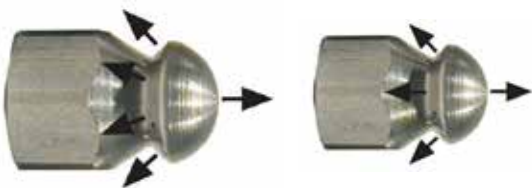

Rotating Sewer Nozzle

- ❖ 4000 PSI maximum
- ❖ Three rotating back jets
- ❖ Greater rotational cleaning power

Part Number	Description
4-01917	1/8" FNPT, .055 orifice
4-01918	1/4" FNPT, .045 orifice
4-01921	3/8" FNPT, .045 orifice



Spring Leader Drain Nozzle

- ❖ 4000 PSI maximum
- ❖ 1/8" FNPT
- ❖ Navigates corners and traps

4-JNSL-4



Duct Cleaner

- ❖ 4000 PSI maximum
- ❖ 12" Diameter cage
- ❖ 2 Spinning nozzles
- ❖ Stainless steel

81556



Sewer Cleaning Hose Assemblies

- ❖ 1/4" MNPT ends
- ❖ Maximum 4350 PSI @ 212° F
- ❖ Durable thermoplastic construction
- ❖ Very flexible

Part Number	Length (ft)
84-084350050	50
84-084350100	100
84-084350150	150
84-084350200	200

Optional Kits

- ❖ Flexible sewer hose
- ❖ Rotating nozzle
- ❖ Coupler

Part Number	Description
30-101	50' Hose Kit
30-102	100' Hose Kit



Jetter Valves

- ❖ Converts a pump into a jetter pump for sewer cleaning

Part Number	Description
1-100315	For General TT Series pumps
1-100316	For General WW Series pumps
1-100317	For General T, TS Series pumps



Foot Actuated Valve

- ❖ 3000 PSI
- ❖ 8 GPM
- ❖ 300° F

4-01920



Foot Actuated Valve

- ❖ 5000 PSI
- ❖ 12 GPM
- ❖ 300° F

84-999002305



Sewer Solution Kit

The "Sewer Solution Kit" is your one stop kit for all your cleaning needs. Available from .125" up to 1.00" and will clean lines from 1" to 24" using only 1.7 GPM to 80 GPM with pressures ranging from 1200 PSI to 15,000 PSI. Customize to your needs with any of the following nozzles.

AP0375SSK-06-045

[A] Penetrator

- ❖ Dislodges blockage
- ❖ 1 Forward Jet, 3 Back Jets

IA90-3B60

[B] Flusher

- ❖ Flushes loose debris
- ❖ 6 Back Jets

6B45-022

[C] Cornering

- ❖ Navigates around P-Traps and tight bends
- ❖ 1 Forward Jet, 1 Side Jet, 3 Back Jets

IA90-1AO-3B60

[D] Polisher

- ❖ Polishes and maximizes line recovery
- ❖ 2 Side Jets, 2 Back Jets

2AO-2B45

[E] De-Icer/De-Greaser


- ❖ Removal of heavily blocked lines with grease, hard soap or even ice.
- ❖ 1 Forward Jet, 3 Forward Angle Jets, 6 Back Jets

3A45-6B60

[F] Impactor

- ❖ Moves sand, grit and light scale which may have accumulated within the line.
- ❖ 1 Forward Jet, 3 Side Jets, 6 Back Jets

IA90-3AO-6B45

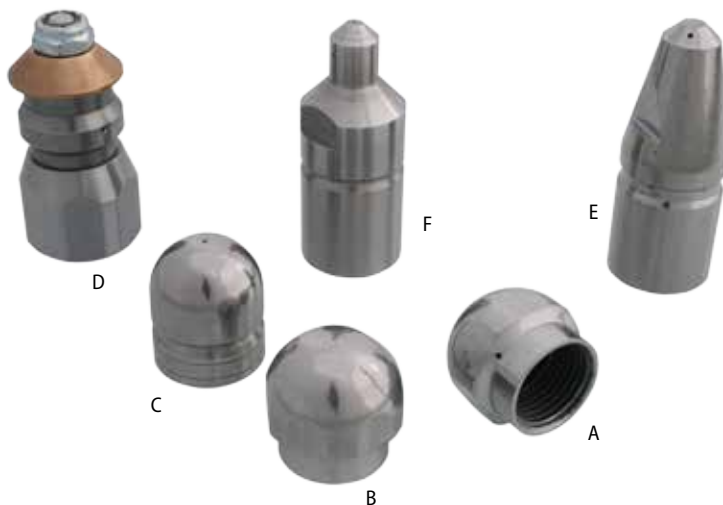

Inline Strainer

- ❖ Removable Screen
- ❖ Clear view
- ❖ 1/2" MNPT x 3/4" GHT

1-100649



Inline Strainer

- ❖ 145 PSI
- ❖ 1/2" MNPT x FNPT
- ❖ Removable filter
- ❖ Diecast metal housing with plastic cap

2-1908



Plastic Inline Strainer

- ❖ 3/4" FNPT
- ❖ Stainless steel strainer

Part Number	Description
8-3350034	50 Mesh
8-3350035	80 Mesh



Aluminum Inline Strainer

- ❖ 1 -1/4" FNPT
- ❖ 80 mesh stainless steel strainer

2-1950



Inlet Screen

- ❖ Garden hose
- ❖ Rubber gasket with stainless mesh
- ❖ 3/4" S.S. GHT

2-1902



Strainer w/Check

- ❖ 1/4" Barb x Plastic

2-19050



Inlet Screen

- ❖ Inline Filter
- ❖ High pressure
- ❖ Removable screen

2-99071



Black Wrapped Hose Assemblies

- ❖ Comes with couplers
- ❖ All hoses have 275° F temperature rating

Part Number	Length (ft)	Type	Max PSI
4-020625-F	25	R1	3000
4-020650-F	50	R1	4000
4-020675-F	75	R1	4000
4-020699-F	100	R1	4000
4-020725-F	25	R2	5000
4-020750-F	50	R2	5000
4-020799-F	100	R2	5000
4-020450-F	50	R2	5800
4-020499-F	100	R2	5800
4-020450-FHP*	50	R2	5800

* Comes with 11,000 PSi Couplers to be used with all pressure washers 5000 PSI and above



Blue Non-Marking Hose Assemblies

- ❖ Comes with Couplers
- ❖ All hoses have 275° F temperature rating

Part Number	Length (ft)	Type	Max PSI
4-02033450B-F	50	R1	3000
4-02033498B-F	100	R1	3000
4-02043450B-F	50	R2	5000
4-02043498B-F	100	R2	5000



Steam Hose

- ❖ 350 PSi @ 325° F / 3000 PSi @ 250° F
- ❖ Solid 3/8" MNPT ends

Part Number	Length (ft)	Type	Max PSI
4-02173350	50	R1	3000
4-02173399	100	R1	3000



Landa Non-Pivot Reel

- ❖ Hand crank non-pivot hose reel
- ❖ Rated 5000 PSI, 325° F
- ❖ Can be used with a variety of brackets for various mounting configurations (see next page...)
- ❖ **Hose and coupling hose not included**

Part Number	Description
4-02751025L	Max 100 ft 3/8" R1 Hose
4-02751026L	Max 200 ft 3/8" R1 Hose



Landa Pivot Reel

- ❖ Hand crank 360° swivel hose reel
- ❖ Rated 5000 PSI, 325° F
- ❖ Can be used with a variety of brackets for various mounting configurations (see next page...)
- ❖ **Hose and coupling hose not included**

Part Number	Description
4-02751030L	Max 100 ft 3/8" R1 Hose
4-02752030L	Max 200 ft 3/8" R1 Hose



E-ZEE Reels

- ❖ Hand crank base or wall mount hose reel
- ❖ Rated 4000 PSI, 225° F
- ❖ Can be used with a variety of brackets for various mounting configurations (see next page...)
- ❖ **Hose and coupling hose not included**

Part Number	Description
4-02755020	Max 50 ft 3/8" R1 Hose DISCONTINUED
4-02755030	Max 100 ft 3/8" R1 Hose
4-02755040	Max 150 ft 3/8" R1 Hose DISCONTINUED
4-02755050	Max 200 ft 3/8" R1 Hose



Landa Reel Brackets



Universal non-pivot reel bracket

4-02751045L

Universal pivot reel bracket, round & square tube or up to 1-1/2"

4-02751032L

Wall mount pivot reel bracket

4-02751036L

Skid mount pivot reel bracket

4-02751037L

Floor mount pivot reel bracket

4-02751035L

Support arm non-pivot

4-02751043L

Support arm 90°, non-pivot

4-02751044L

Support arm 45°, non-pivot

4-02751060L

Landa Reel Swivel

- ❖ 1/2" x 3/8" FNPT
- ❖ 4000 PSI pressure rated



Part Number	Description
4-02751028L	Landa pivot swivel base
4-02751028EL	Landa swivel reel

Coupling Hoses

- ❖ Connect Hose Reel to Machine
- ❖ 3/8" MNPT ends



Part Number	Description
4-0204505	5' Reel coupling hose
4-0204509	9' Reel coupling hose

E-Zee Reel Swivel

- ❖ 1/2" x 3/8" FNPT
- ❖ 4000 PSI pressure rated



Part Number	Description
4-421047	Swivel
4-0203611	Repair Kit

E-ZEE Reel Mounting Bracket

- ❖ Mount E-ZEE reel to machine, floor or wall using #4-02751031, 32, 33, 36
- ❖ Includes fasteners

95-072900901

Cox Hand Crank Reels

- ❖ Hand crank non-pivot hose reel
- ❖ Rated 4000 PSI, 225° F
- ❖ Hose and coupling hose not included

Part Number	Description
4-02750003	Maximum 100' x 3/8' R1 Hose
4-02750001	Maximum 200' x 3/8' R1 Hose
4-0275112512	Wheeled cart for above 200' reel



Cox Reel Caddies

- ❖ Hand crank non-pivot hose reel
- ❖ Rated 4000 PSI, 225° F
- ❖ Hose and coupling hose not included

Part Number	Description
4-0275150CM	150' Reel caddy, Hand carry
4-0275200DM	200' Reel caddy, Wheeled cart



Cox Spring Rewind Reel

- ❖ Self rewind non-pivot hose
- ❖ Rated 3000 PSI, 225° F
- ❖ Maximum 100' x 3/8" R1 Hose
- ❖ Hose and coupling hose not included

4-0275N3100



Replacement Swivel

- ❖ 4000 PSI pressure rated
- ❖ 225° F



Part Number	Description
4-020362	1/2" FNPT
4-020363	3/8" FNPT

Rapid Reel Garden Hose Reels

- ❖ Made in USA
- ❖ Die cast aluminum
- ❖ Adjustable braking system
- ❖ Powdercoat finish
- ❖ 150 PSI pressure rated and 140° f
- ❖ This single versatile reel mounts perpendicular or parallel to a wall and can be setup for either right or left handed operation
- ❖ 5/8" x 150' capacity or 3/4" x 100 capacity
- ❖ **Hose not included**

4-02751041GH



- ❖ This reel is designed with no-slip rubber feet so it can be moved around without having to be bolted to a wall
- ❖ 5/8" x 150' capacity or 3/4" x 100 capacity
- ❖ **Hose not included**

4-02751042GH



- ❖ This portable model comes with flat free foam filled tires for ease of mobility and reliability
- ❖ It can be converted to a 4 wheeled model and be expanded to hold up to 225' x 5/8" hose
- ❖ 5/8" x 150' capacity or 3/4" x 100 capacity
- ❖ **Hose not included**

4-02751043GH



Brass Couplers

Part Number	Description
2-2000	1/4" FNPT
2-2001	1/4" MNPT
2-2002	3/8" FNPT
2-2003	3/8" MNPT



Available in Stainless Steel

Hi-Heat "O" Ring Couplers

Part Number	Description
2-0119	1/4" Viton
2-0121	3/8" Viton
2-01191	1/4" Silicone
2-01211	3/8" Silicone



Steel Nipples

Part Number	Description
2-2004	1/4" FNPT
2-2005	1/4" MNPT
2-2005	3/8" FNPT
2-2007	3/8" MNPT



Available in Stainless Steel

11,000 PSI Couplers and Nipples

Part Number	Description
2-20021	3/8" FNPT Brass coupler
2-20022	3/8" FNPT Steel nipple
2-20023	1/4" FNPT Brass coupler
2-20024	1/4" FNPT Steel nipple
2-20028	1/4" MNPT Steel nipple



M22 Metric Couplers

Part Number	Description
2-2110	1/4" FNPT
2-21100	1/4" MNPT
2-2113	3/8" FNPT
2-21131	3/8" MNPT



M22 Metric Nipples

Part Number	Description
2-2112	1/4" FNPT
2-2116	1/4" MNPT
2-2114	3/8" FNPT
2-2115	3/8" MNPT



High Pressure Inline Swivel

- ❖ 3/8" FNPT x 3/8" MNPT
- ❖ 4000 PSI
- ❖ 250° F
- ❖ Live swivel
- ❖ Place between hose and gun inlet

MM-32564



Steam Dragon

- ❖ This highly concentrated caustic liquid is ideal for degreasing engines and heavy equipment.
- ❖ Designed for use with hot high pressure washers and steam cleaners it is also effective with cold water pressure washers.
- ❖ Steam Dragon is a biodegradable product and is safe for use on steel, iron, stainless steel and concrete surfaces.

Part Number	Description
9-400004	4 litre
9-400020	20 litre
9-400208	205 litre



E-Z CLEAN

- ❖ E-Z Clean is a concentrated general purpose cleaner ideal for use on painted aluminum and vinyl siding as well as concrete, brick, painted woodwork, plastics, rubber, vehicles, fabrics etc.
- ❖ It contains no caustic or acid and is biodegradable.

Part Number	Description
9-300004	4 litre
9-300020	20 litre
9-300208	205 litre



Coil Clean

- ❖ Powdered scale and deposit remover for cleaning and maintaining your hot water pressure washer coil.
- ❖ 8 lb tub

9-028008



The above chemicals are concentrated and must be diluted.
Refer to directions on container for dilution factors.
All of the above chemicals comply with "W.H.M.I.S." regulations.

Landa Pump Oil

- ❖ Exceeds specifications for use in Landa, Admiral, AR, Interpump General Pump and other pumps
- ❖ 32 oz.

90-8006



General Pump Oil

- ❖ Specifically formulated for General pumps
- ❖ 16 oz.

90-8005GP



Cat Pump Oil

- ❖ Premium formulation designed for use in Cat Pumps
- ❖ Reduced foaming & corrosion
- ❖ 21 oz.

90-8004



Engine Oil

- ❖ Pro-tec
- ❖ 1 litre

90-8003



Sand Injector

- ❖ Maximum 4000 PSI
- ❖ For paint, graffiti or rust removal
- ❖ Dust free
- ❖ Brass body with tungsten carbide mixing chamber
- ❖ 25 foot sand injector hose
- ❖ For use with sand, glass bead, baking soda and other fine abrasives

Part Number	Description
4-011200-0	050 Nozzle orifice
4-011200-1	060 Nozzle orifice
4-011200-2	065 Nozzle orifice
4-011200-3	080 Nozzle orifice



Sand Blaster with Probe

- ❖ Maximum 5000 PSI
- ❖ Industrial sandblaster kit
- ❖ Hot or cold water use
- ❖ Quick disconnect sand probe
- ❖ Large mixing chamber
- ❖ Adjustable air feed

4-011211



Heavy Duty Wet Sandblast Kit

- ❖ Maximum 5000 PSI
- ❖ Wheeled sandpot
- ❖ 40" sand wand with flow control,
- ❖ 25' sand siphon hose
- ❖ Tungsten Carbide sand nozzle
- ❖ Face shield

4-011201



Landa Cyclone Surface Cleaner

- ❖ For use with hot or cold pressure washers
- ❖ Maximum 4000 PSI @ 200° F.
- ❖ Fixed height
- ❖ Without trigger gun

30-587



Landa Water Jet Surface Cleaner

- ❖ For use with hot or cold pressure washers
- ❖ Maximum 4000 PSI @ 200° F.
- ❖ Adjustable height
- ❖ With trigger gun


30-585



Wall Cleaner

- ❖ With brush skirt
- ❖ Maximum 4000 PSI @ 180° F
- ❖ Fixed height
- ❖ Rotating swivel arms
- ❖ 30% faster than regular wand and no overspray
- ❖ Swiss made
- ❖ With trigger gun

Part Number	Length
EG200	8" Diameter
EG300	12" Diameter

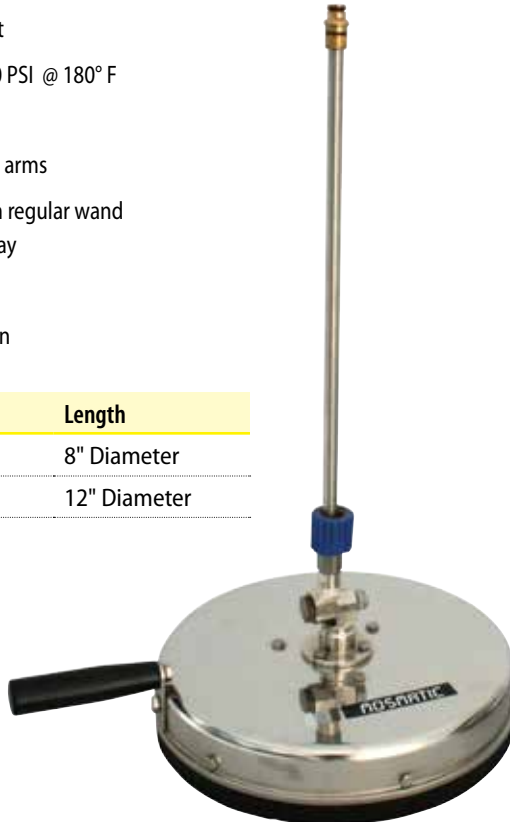

20" Surface Cleaner

- ❖ Maximum 4000 PSI, 180° F
- ❖ 20" Cleaning Path
- ❖ Heavy-Duty Anodized
- ❖ Aluminum components
- ❖ Rugged ABS Cover

30-585-20B



Water Broom

- ❖ 4 nozzle
- ❖ With casters
- ❖ 4000 PSI
- ❖ Requires 4 Meg nozzles

1-100870



General Replacement Pumps

- ❖ Comes with unloader, inlet/outlet fittings, ready to bolt on
- ❖ Gas engine flange

Part Number	GPM	PSI	Engine Power	Application
5-TT2530	2.8	2500	5.5 or 6.5 HP	Industrial Duty
5-UH2016	4.0	3000	11 or 13 HP	Industrial Duty
5-WW961	4.0	3000	11 or 13 HP	Extreme Duty
5-WW965	4.0	4000	13 HP	Extreme Duty



AR Replacement Pumps

- ❖ Comes with unloader, inlet/outlet fittings, ready to bolt on
- ❖ Gas engine flange


Part Number	GPM	PSI	Engine Power	Application
5-SJV	2.5	2500	5 or 6 HP	Consumer
5-XMV-3	3.0	2700	5.5 or 6.5 HP	Industrial Duty
5-SXMV4	4.0	4000	11 or 13 HP	Industrial Duty



Cat Replacement Pumps

- ❖ Comes with unloader, inlet/outlet fittings, ready to bolt on
- ❖ Gas engine flange

Part Number	GPM	PSI	Engine Power	Application
5-2DX30GS	3.0	2000	5.5 HP	Industrial Duty
5-3DX25GSI	2.5	2500	6.5 HP	Industrial Duty
5-66DX40G11	4.0	4000	11 or 13 HP	Extreme Duty

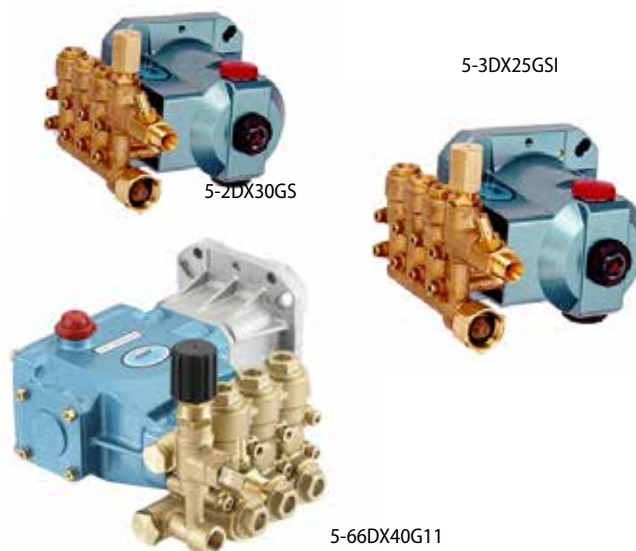

Pulsar 3 Unloader

- ❖ 4350 PSI
- ❖ 8 GPM
- ❖ 195° F
- ❖ Pressure actuated
- ❖ Blue spring with adjustment knob
- ❖ 3/8" FNPT inlet / outlet / bypass

5-3020



ST261/S Unloader

- ❖ 3600 PSI
- ❖ 8 GPM
- ❖ 180° F
- ❖ Switches at full bypass flow
- ❖ Wired normally closed
- ❖ 10 Amp, 110/230V

5-3225



VB75 Unloader

- ❖ 3200 PSI
- ❖ 8 GPM
- ❖ 200° F
- ❖ Integrated unloader (bolts directly on to pump)
- ❖ Pressure adjustment knob
- ❖ 3/8" inlet / outlet

5-3022

Same with Injector

5-30221



ZK1 Unloader

- ❖ 0 to 3600 PSI
- ❖ 2.3 to 10.3 GPM
- ❖ 165° F
- ❖ 3/8" inlet
- ❖ 1/2" discharge / bypass
- ❖ Flow activated

5-3000



UVB60 Unloader

- ❖ 4060 PSI @ 21 GPM
- ❖ 200° F
- ❖ 1/2" inlet / outlet / bypass
- ❖ Pressure actuated

5-30122

Stainless Steel model

- ❖ 5800 PSI @ 21 GPM
- ❖ 195° F
- ❖ 1/2" inlet / outlet / bypass

5-30122SS



Pump Protectors

- ❖ Prevents high heat from damaging pump
- ❖ Dumps hot water out

Part Number	Description
2-300816	3/8" MNPT, 140° F
2-30082	1/2" MNPT, 140° F
2-3008150	1/2" MNPT, 192° F



Rupture Disk Assembly

- ❖ Prevents thermal expansion of water in coil
- ❖ 7000 PSI rupture point

2-3409



Pop Off Valves

- ❖ Provides safety from over pressurization
- ❖ 3600 Pop Off
- ❖ Self resetting
- ❖ 1/4" MNPT

Part Number	Description
81-22560	2400 PSI
81-22565	3600 PSI



Inline Pressure Regulator

- ❖ Reduces inlet pressure to 20 PSI
- ❖ 200 PSI Maximum inlet
- ❖ 3/4" MGH outlet

2-3010



Downstream Chemical Injectors

- ❖ Siphon hose
- ❖ Quick disconnects
- ❖ Attaches to outlet of pressure washer
- ❖ Low pressure soap
- ❖ Requires soap tip
- ❖ Chemicals don't go through pump



Part Number	Description
4-011191-2.1	2.6 – 4 GPM
4-011191-2.3	4 – 5.3 GPM
4-011191-1.8	.5 – 2.6 GPM

Upstream Chemical Injectors

- ❖ Siphon hose
- ❖ Attaches to inlet of pressure washer
- ❖ Apply soap at high pressure
- ❖ 3/4" FGH inlet x 3/4" MGH outlet



Part Number	Description
3-130264-1	1.5 – 4 GPM
3-130264-4	4 – 7 GPM

Stainless Steel Downstream Injector

- ❖ Injector only
- ❖ .3 to 5 GPM
- ❖ 5500 PSI maximum input
- ❖ Acid resistant

3-12044SS



Aluminum Foamer

- ❖ Maximum 2500 PSI
- ❖ 1/4" FNPT
- ❖ Use with Upstream Injector System


4-2007



Aqua Minder

- ❖ Automatically adds soap and maintains level in soap tank

3-1001

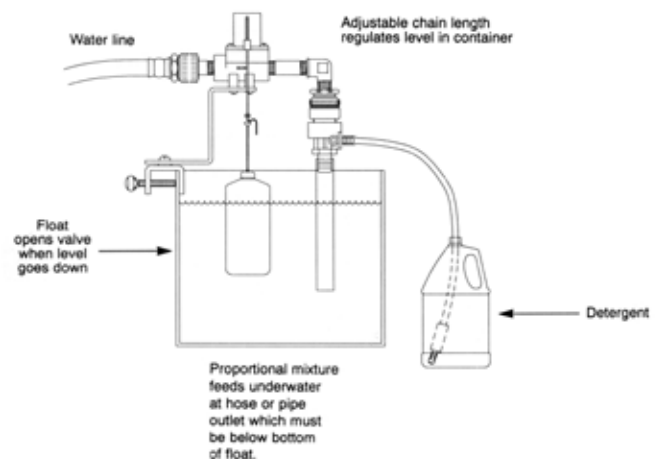

Foamer with Metering Valve

- ❖ 1/4" MNPT
- ❖ Increase dwell time
- ❖ Adjustable chemical control
- ❖ 1/4" ID Hose barb
- ❖ 176° F
- ❖ Stainless internal foam turbulator

1-000FML01



Foamer with Tank

- ❖ 1/4" MNPT
- ❖ Dispense chemicals in a thick foam
- ❖ Increase dwell time
- ❖ Adjustable chemical control
- ❖ 1L tank
- ❖ 176° F
- ❖ Stainless internal foam turbulator

1-000FML01T



Hydrostatic Test Assembly

Part Number	Description
HST-300	300 PSI Maximum
HST-700	700 PSI Maximum
HST-1000	1000 PSI Maximum

**Idle Down Controls**

- ❖ Reduce engine RPM to idle when trigger is let go
- ❖ RPM goes back to normal when trigger is depressed
- ❖ Save of fuel, pump wear and noise
- ❖ 1/4" MNPT connection
- ❖ Attaches to throttle linkage on engine

Part Number	Description
1-ZSPEED	Gas engine cable idle down control 800 - 3600 PSI capacity.
1-Z101H	Honda engine cableless idle down control for 11 & 13 HP gas engines
1-Z102V	Briggs engine cableless idle down control for 16 & 18 HP Vanguard gas engines.



ZSPEED



Z101H/V

Pressure Gauge

- ❖ Lower mount
- ❖ 1/4" MNPT
- ❖ Glycerine filled

Part Number	Description
4-0500	0-1000 PSI
4-05001	0-2000 PSI
4-0501	0-3000 PSI
4-0502	0-5000 PSI
4-0504	0-300 PSI



Pressure Test Gauge Assembly

- ❖ 0-5000 PSI
- ❖ 2-1/4" Glycerine filled
- ❖ Quick disconnects
- ❖ Tests for spike and operating pressure
- ❖ A must for field diagnostics

4-0600



Pressure Temperature Test Gauge

- ❖ Measures pressure and temperature
- ❖ 5000 PSI maximum
- ❖ 500° F maximum thermometer
- ❖ Quick disconnects
- ❖ A must for field diagnostics

4-0601



Wheel Kits

Part Number	Description
4-03179	Powerjet Extreme duty wheel kit
4-03179MI	Powerjet Heavy duty "B" frame wheel kit
4-03179REV	Powerjet Reversible handle wheel kit
4-03179HR	Powerjet Hose reel mount wheel kit



4-03179



4-03179MI



4-03179HR



4-03179REV

Wheel Kits

Part Number	Description
4-0303	10" Pneumatic tire and wheel, 5/8" steel bearing
4-0303L	10" Pneumatic tire and wheel, 5/8" best quality
4-0303FC	10" Pneumatic flat free tire and wheel, 5/8" best quality
4-0307	13" Pneumatic tire and wheel, 5/8" best quality



Car Wash Booms

- ❖ 3000 PSI maximum
- ❖ 5.5' radius, 11' swing diameter
- ❖ 3/8" FNPT inlet
- ❖ 360° ceiling mount
- ❖ Hose not included
- ❖ Available in 7' and 8' radius.



Part Number	Description
4-OHB360	360° Ceiling mount
4-OHB180	180° Wall mount

Wall Mount Bracket

- ❖ 5.5' swing radius
- ❖ 180° Wall mount applications



Pit Cleaner

- ❖ Removes water laden sludge from collection pits or tanks.
- ❖ Produces 11 times more suction volume than pressure washer output.
(ie; 4 GPM pressure washer will suck 44 GPM of sludge)
- ❖ 7' PVC wand and gun assembly.
- ❖ 20' x 1-12" suction hose with camlock.

30-575



Sludge cart

- ❖ Sludge from the pit cleaner can be deposited into the sludge bag.
- ❖ Water permeates leaving the sludge to be disposed of.
- ❖ Hand truck design with pneumatic tires.
- ❖ Comes with 5 bags.

30-580



Suction Head

- ❖ Head only, no fittings or nozzle

84-20003650



1-000FML01	56	4-0307	59	4-0111421	31	4-YRL51	27
1-000FML01T	56	4-0500	58	4-0111518	33	4-YRL56	27
1-100315	38	4-0501	58	4-0111518B	33	5-2DX30GS	52
1-100316	38	4-0502	58	4-0111519CK	33	5-3DX25GSI	52
1-100317	38	4-0504	58	4-0111524	33	5-66DX40G1I	52
1-100649	40	4-0600	58	4-0146540	35	5-3000	53
1-100870	51	4-0601	58	4-0203611	43	5-3020	53
1-Z101H	57	4-01109	32	4-0204505	43	5-3022	53
1-Z102V	57	4-01202	27	4-0204509	43	5-3225	53
1-ZSPEED	57	4-01204	28	4-0275150CM	44	5-30122	53
2-0119	46	4-01205	27	4-0275200DM	44	5-30122SS	53
2-0121	46	4-01207	30	4-352616	28	5-30221	53
2-01191	46	4-01212	27	4-368118	32	5-SJV	52
2-01211	46	4-01917	37	4-368124	32	5-SXMV4	52
2-1902	40	4-01918	37	4-368158	32	5-TT2530	52
2-1908	40	4-01920	38	4-373710	35	5-UH2016	52
2-1950	40	4-01921	37	4-374091	35	5-WW961	52
2-2000	46	4-2000	35	4-374092	35	5-WW965	52
2-2001	46	4-2007	55	4-421047	43	5-XMV-3	52
2-2002	46	4-2012	36	4-500000	31	6B45-022	39
2-2003	46	4-2013	36	4-500500	31	8-3350034	40
2-2004	46	4-2014	36	4-02033450B-F	41	8-3350035	40
2-2005	46	4-2100	32	4-02033498B-F	41	9-028008	47
2-2005	46	4-2100BR	33	4-02043450B-F	41	9-300004	47
2-2007	46	4-03179	59	4-02043498B-F	41	9-300020	47
2-2110	46	4-03179HR	59	4-02173350	41	9-300208	47
2-2112	46	4-03179MI	59	4-02173399	41	9-400004	47
2-2113	46	4-03179REV	59	4-02750001	44	9-400020	47
2-2114	46	4-05001	58	4-02750003	44	9-400208	47
2-2115	46	4-011142A	31	4-02751025L	42	30-101	38
2-2116	46	4-011143A	31	4-02751026L	42	30-102	38
2-3010	54	4-011191-1.8	55	4-02751028EL	43	30-575	60
2-3409	54	4-011191-2.1	55	4-02751028L	43	30-580	60
2-19050	40	4-011191-2.3	55	4-02751030L	42	30-585	50
2-20021	46	4-011200-0	49	4-02751032L	43	30-585-20B	51
2-20022	46	4-011200-1	49	4-02751035L	43	30-587	50
2-20023	46	4-011200-2	49	4-02751036L	43	81-21250	27
2-20024	46	4-011200-3	49	4-02751037L	43	81-22560	54
2-20028	46	4-011201	49	4-02751041GH	45	81-22565	54
2-21100	46	4-011211	49	4-02751042GH	45	84-100024	29
2-21131	46	4-16540	35	4-02751043GH	45	84-100036	29
2-30082	54	4-19245	35	4-02751043L	43	84-100048	29
2-99071	40	4-020362	44	4-02751044L	43	84-100060	29
2-300816	54	4-020363	44	4-02751045L	43	84-100079	29
2-3008150	54	4-020450-F	41	4-02751060L	43	84-20003650	60
2AO-2B45	39	4-020450-FHP*	41	4-02752030L	42	84-084350050	38
3-1001	55	4-020499-F	41	4-02755020	42	84-084350100	38
3-12044SS	55	4-020625-F	41	4-02755030	42	84-084350150	38
3-130264-1	55	4-020650-F	41	4-02755040	42	84-084350200	38
3-130264-4	55	4-020675-F	41	4-02755050	42	84-121370170	37
3A45-6B60	39	4-020699-F	41	4-021733250	41	84-122370170	37
4-0275N3100	44	4-020725-F	41	4-0275112512	44	84-123065187	37
4-0303	59	4-020750-F	41	4-JNSL-4	37	84-200009700	30
4-0303FC	59	4-020799-F	41	4-OHB180	60	84-200085710	32
4-0303L	59	4-0111381A	31	4-OHB360	60	84-200357530	36

84-200357535	36	MPE5-50024C.	26	PJG-4002B.	10
84-200357540	36	MPE5-50024F.	26	PJG-4005B.	10
84-200357545	36	PE4-20021A	22		
84-200357550	36	PE4-20021B	22		
84-200357555	36	PE4-20021C	22		
84-200357560	36	PE4-20021F	22		
84-200357570	36	PE4-30021A	23		
84-200357580	36	PE4-30021B	23		
84-200457530	36	PE4-30021C	23		
84-200457535	36	PE4-30021F	23		
84-200457540	36	PE4-40021B	25		
84-200457545	36	PE4-40021C	25		
84-200457550	36	PE4-40021F	25		
84-200457555	36	PE5-30021B	24		
84-200457560	36	PE5-30021C	24		
84-200457570	36	PE5-30021F	24		
84-200457580	36	PG4-25321TM.	13		
84-202000044	27	PG4-30321M	14		
84-202605600	28	PG4-35321M	14		
84-203002600	28	PG4-40321EM.	15		
84-203002600	29	PG4-40324EM.	15		
84-999000026	29	PG5-50321EM.	16		
84-999000027	29	PG5-50324EM.	16		
84-999002305	38	PJE-1001	17		
85-5170D24.	30	PJE-1001B	17		
85-5170D36.	30	PJE-1401	18		
85-5170D48.	30	PJE-1401B	18		
85-5170D60.	30	PJE-1501	19		
85-5170D79.	30	PJE-1501B	19		
89-100036.	29	PJE-2001	20		
90-8003	48	PJE-2001B	20		
90-8004	48	PJE-3001	21		
90-8005GP.	48	PJE-3001B	21		
90-8006	48	PJG-2001.	5		
95-072900901	43	PJG-2001B.	5		
81556.	37	PJG-2002B.	5		
AP0375SSK-06-045	39	PJG-2005B.	5		
EG200.	51	PJG-2501.	7		
EG300.	51	PJG-2501-6.5	6		
GC-2305B	11	PJG-2501-6.5B	6		
GC-2305BI-25.	12	PJG-2501B.	7		
GC-2705B	11	PJG-2502-6.5B	6		
GC-2705BI-25.	12	PJG-2505-6.5B	6		
HST-300	57	PJG-3000.	8		
HST-700	57	PJG-3000B.	8		
HST-1000.	57	PJG-3001.	8		
IA90-1AO-3B60.	39	PJG-3001B.	8		
IA90-3AO-6B45.	39	PJG-3002B.	8		
IA90-3B60	39	PJG-3005B.	8		
MM-32564.	46	PJG-3501.	9		
MP4-40321EM	15	PJG-3501B.	9		
MP4-40324EM	15	PJG-3505.	9		
MP5-50321EM	16	PJG-3505B.	9		
MP5-50324EM	16	PJG-4001.	10		
MPE5-50024B.	26	PJG-4001B.	10		



20186-113B Ave. Maple Ridge, B.C. Canada

Toll Free 1-800-595-2632

Fax: 604-942-4950

www.mancorp.ca

info@mancorp.ca